

# Fitch-style natural deduction macros

Peter Selinger  
University of Ottawa

Version 0.5, February 8, 2005

## 1 Overview

This document describes how to use the `fitch.sty` macros for typesetting Fitch-style natural deduction derivations. To load the macros, simply put `\input{fitch.sty}` near the beginning of your L<sup>A</sup>T<sub>E</sub>X file.

Here is a natural deduction derivation, together with the code that produced it:

1	$P \vee Q$				
2	$\neg Q$				
3	<div style="border-left: 1px solid black; padding-left: 5px;"><math>P</math></div>				
4	<div style="border-left: 1px solid black; padding-left: 5px;"><math>P</math></div>	R, 3			
5	<div style="border-left: 1px solid black; padding-left: 5px;"><math>Q</math></div>				
6	<div style="border-left: 1px solid black; padding-left: 5px;"><math>\neg Q</math></div>	R, 2			
7	$\perp$	-E, 5, 6			
8	$P$	$\perp$ E, 7			
9	$P$	$\vee$ E, 1, 3-4, 5-8			

```

\l
\begin{nd}
  \hypo {1} {P\vee Q}
  \hypo {2} {\neg Q}
  \open
  \hypo {3} {P}
  \have {4} {P}      \r{3}
  \close
  \open
  \hypo {aa} {Q}
  \have {6} {\neg Q} \r{2}
  \have {7} {\bot}  \ne{aa,6}
  \have {8} {P}     \be{7}
  \close
  \have {9} {P}     \oe{1,3-4,aa-8}
\end{nd}
\l

```

A derivation consists of *lines*, and each line contains a *line number* and a *formula*. Some lines also carry a *justification*. Moreover, each line is either a *hypothesis* or a *derived formula*. Generally, derived formulas carry a justification, whereas hypotheses do not; however, the macros do not enforce this.

Derivations are typeset inside the `nd` environment, which must be used in math mode. The commands `\hypo` and `\have` are used to typeset one line of the derivation; `\hypo` is used for hypotheses, and `\have` for derived formulas. Both commands take a label and a formula as an argument. Note that the labels used to identify lines in the derivation need not be actual line numbers; for instance, in the above example, we used the label `aa` instead of 5. In the output, lines are automatically numbered consecutively. Labels may not contain any punctuation characters or spaces.

Subderivations are opened and closed with the commands `\open` and `\close`. Finally, the following commands are provided for annotating lines with justifications:

<code>\r</code> reiteration	<code>\oi</code> or introduction	<code>\nne</code> double negation elimination
<code>\ii</code> implication introduction	<code>\oe</code> or elimination	<code>\Ai</code> forall introduction
<code>\ie</code> implication elimination	<code>\ni</code> not introduction	<code>\Ae</code> forall elimination
<code>\ai</code> and introduction	<code>\ne</code> not elimination	<code>\Ei</code> exists introduction
<code>\ae</code> and elimination	<code>\be</code> bottom elimination	<code>\Ee</code> exists elimination

Each such command takes a *reference list* as an argument. A reference list is a string made from labels, commas, and hyphens, for instance `1,3a-3b,4a-4d`.



## 2.5 Scope

The commands `\hypo`, `\have`, `\open`, `\close`, `\r`, `\ii`, and so forth are only available inside an `nd` environment. These commands may have a different meaning elsewhere in the same document. The only commands provided by the `fitch.sty` package which are visible outside an `nd` environment are the command `\ndref` described in Section 2.4, and the command `\nddim` and the dimension `\ndindent` described in Section 2.9.

## 2.6 Breaking it across pages

The `nd` environment is derived from the L<sup>A</sup>T<sub>E</sub>X `array` environment, and thus it does not break across pages automatically. However, if a derivation is too long to fit on a single page, it is possible to split it manually into physically independent, but logically consecutive subparts. For this purpose, the `ndresume` environment is provided to continue a previously interrupted derivation. Here is an example:

1	$P \vee Q$						\$
2	$\neg Q$						<code>\begin{nd}</code>
3	<div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"><math>P</math></div>						<code>\hypo {1} {P\vee Q}</code>
4	<div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"><math>P</math></div>	R, 3					<code>\hypo {2} {\neg Q}</code>
5	<div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"><math>Q</math></div>						<code>\open</code>
6	<div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"><math>\neg Q</math></div>	R, 2					<code>\hypo {3} {P}</code>
Derivations can be interrupted and resumed at any point.							
7	<div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"><math>\perp</math></div>	$\neg E$ , 5, 6					<code>\have {4} {P} \quad \quad \quad \backslashr{3}</code>
8	$P$	$\perp E$ , 7					<code>\close</code>
9	$P$	$\vee E$ , 1, 3-4, 5-8					<code>\open</code>
Derivations can be interrupted and resumed at any point.							
\$							
<code>\begin{ndresume}</code>							
<code>\have {7} {\bot} \quad \quad \quad \backslashne{aa,6}</code>							
<code>\have {8} {P} \quad \quad \quad \backslashbe{7}</code>							
<code>\close</code>							
<code>\have {9} {P} \quad \quad \quad \backslashoe{1,3-4,aa-8}</code>							
<code>\end{ndresume}</code>							
\$							

## 2.7 Custom line numbers

One often needs to write derivation schemas, rather than derivations. This often requires the use of symbolic constants such as  $n$ ,  $n + 1$ , etc, instead of actual line numbers. The `\have` and `\hypo` commands have an optional first argument which is a symbolic constant. For instance, `\have[n]` will cause the current line to be numbered with the symbolic constant  $n$ . Subsequent lines are automatically numbered  $n + 1$  etc. An initial offset can be given as a second optional argument, as in `\have[n] [-1]`, which will cause the current line to be numbered  $n - 1$ , the following line  $n$ , etc. In an explicit offset is given, the symbolic constant can also be absent: for instance, the command `\have [] [7]` resets the current line number to 7. The following example illustrates this behavior:




## 2.9 Customizing dimensions

The relative sizes of the various elements of a natural deduction proof are preset to reasonable values depending on the size of the currently selected font. However, it will sometimes be necessary to customize these dimensions. This can be achieved with the `\naddim` command. The syntax of the command is as follows:

$$\backslash\text{naddim}\{height\}\{topheight\}\{depth\}\{labelsep\}\{indent\}\{hsep\}\{justsep\}\{linethickness\},$$

where each of the eight parameters is a dimension. The meaning of the first seven parameters is shown in the following illustrations; *linethickness* is simply the thickness of the lines.

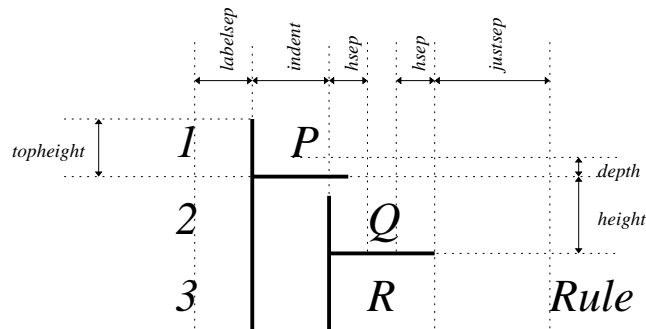

The default dimensions are:

$$\backslash\text{naddim}\{4.5\text{ex}\}\{3.5\text{ex}\}\{1.5\text{ex}\}\{1\text{em}\}\{1.6\text{em}\}\{.5\text{em}\}\{2.5\text{em}\}\{.2\text{mm}\}.$$

In addition, there is a dimension called `\ndindent`, controls the amount of extra indentation used on continuation lines as discussed in Section 2.8. It can be changed and is `1ex` by default.

## 2.10 Other comments

The goal was to design a flexible package which would not impose any constraints on the form of derivations, while making typesetting easy. With this package, it is in fact possible to typeset incomplete, ill-formed, or invalid derivations. Sometimes it is pedagogically necessary to do so.

There are no arbitrary limits on the size or nesting depth of a derivation, except for the obvious requirement of fitting horizontally on the printed page.

## 3 Copyright and license

The following notice applies to the `fitch.sty` macros.

Copyright: © 2002–2005 Peter Selinger

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307, USA.